
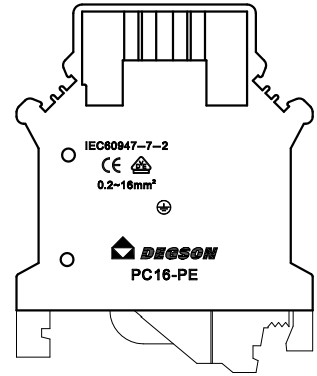
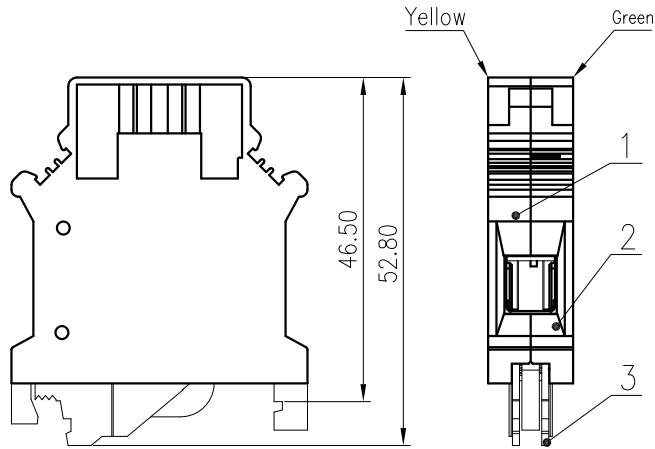


General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

A
B
C
D

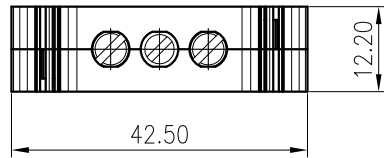

3	Ground contact			
2	Housing2	PA66	UL94V-0	
1	Housing1	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL Standard:			B	C
Rated Voltage(V)/Current(A)			/	/
IEC Standard:				
Overvoltage Category			III/3	/
Pollution Degree			/	/
Rated Voltage(V)/Current(A)			/	/
(KV)/Rate Impulse Voltage(KV)			8.0	/
Torque Tightening(N·m/Lb.in)			M4, 1.2/10.53	
Wire Range(rigid and flexible)(mm²/AWG)			0.2~16/12~4	
Pitch(mm)			12.20	
Stripping length(mm)			11-12	
Operating temperature(°C)			-40~+105	
Conform to RoHS			Yes	
Standard color number:			/	
PANTONE / RAL			/	

MATERIAL:		SURFACE:	
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD PC16-PE	
STATUS:	/		
APPD:			
CHKD:			
DRFT: Zhuwm 2005.11.02	DRAWING NO.: PC16-PE-C01	REV	T2
⊕	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1/1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE