



General tolerances(mm)												0.1/10 ±2'	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



A

A

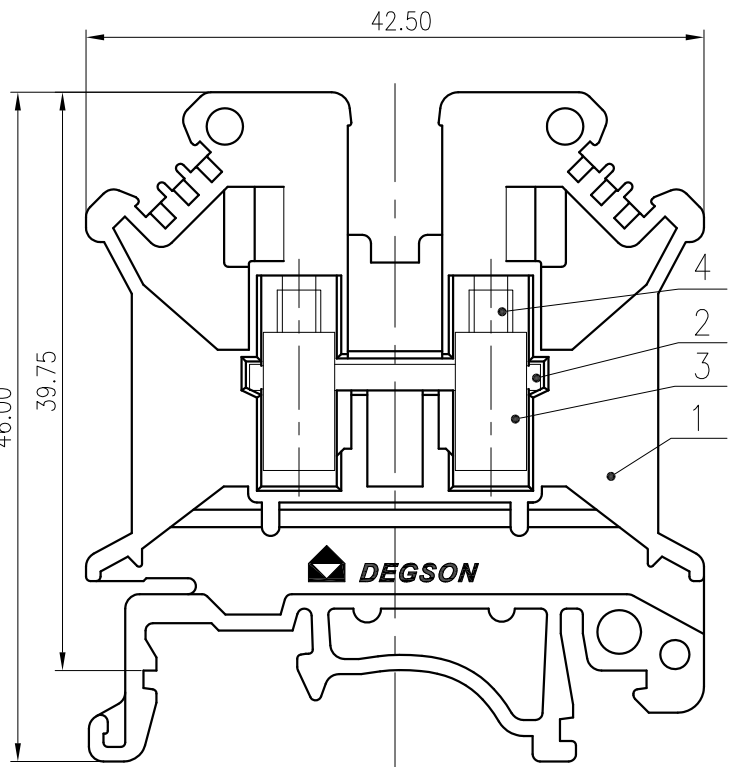

B



B

C

C

D

D

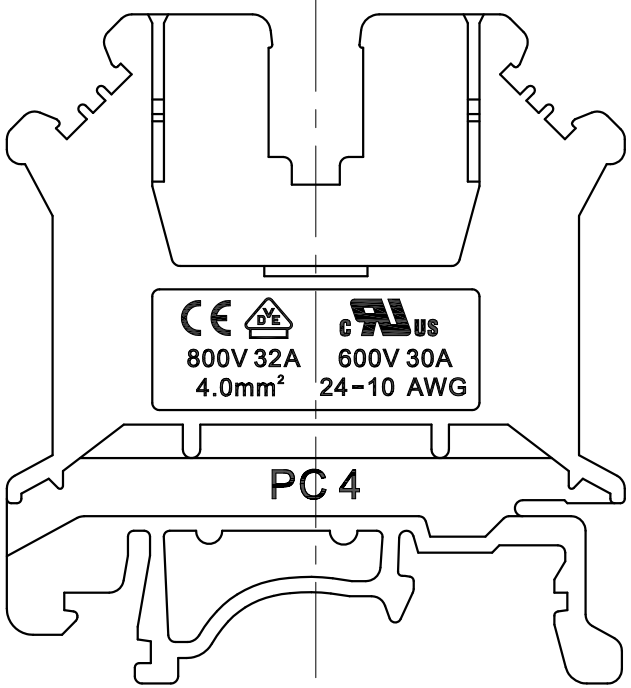

4	Screw	Copper Alloy	M3\Ni Plated
3	Cage	Copper Alloy	M3\Ni Plated
2	Current Carrier	Copper	Sn Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL Standard:			
Rated Voltage(V)/Current(A)		B 600/30	C 600/30
		D 600/30	D 600/5
IEC Standard:			
Overvoltage Category		III/3	/
Pollution Degree		/	/
Rated Voltage(V)/Current(A)		800/32	/
(KV)/Rate Impulse Voltage(KV)		8.0	/
Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43	
Wire Range(rigid and flexible)(mm ² /AWG)		0.2~4.0/24~10	
Pitch(mm)		6.20	
Stripping length(mm)		8~10	
Operating temperature(°C)		-40~+105	
Conform to RoHS		Yes	
Standard color number:		/	
PANTONE / RAL		/	

MATERIAL:	SURFACE:	
MAT NO.: /	NINGBO DEGSON ELECTRICAL CO., LTD PC4-01P-1Y-00A(H)	
STATUS: /		
APPD: Li GL 2020.04.03		
CHKD: Mao J 2020.04.03		
DRFT: LXX 2017.12.25	NAME:	
SIZE: A4 $\leftarrow \frac{mm}{(inch)} \rightarrow$	DRAWING NO.: PC4-C01	REV: T1
	TYPE: CUSTOMER DRAWING	SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE