
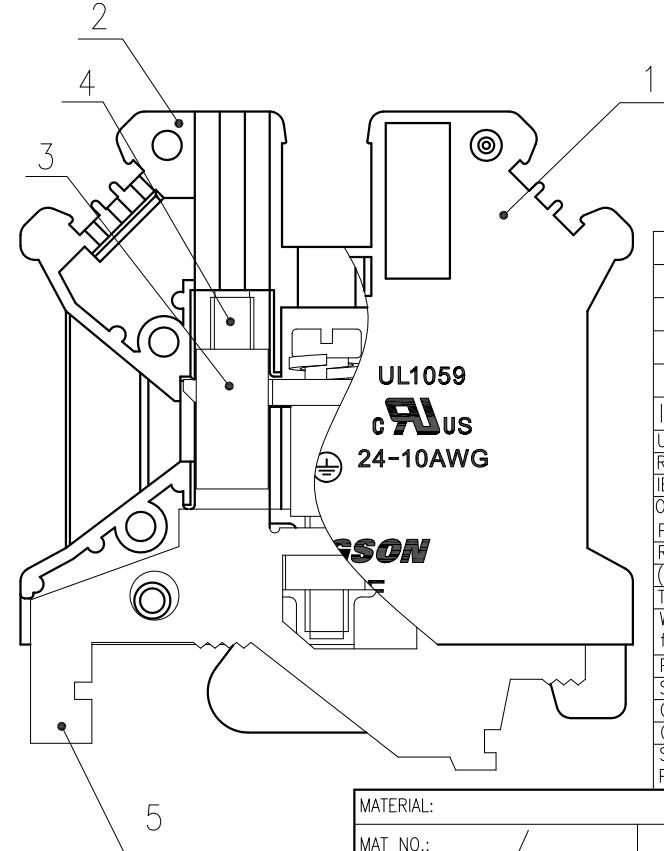

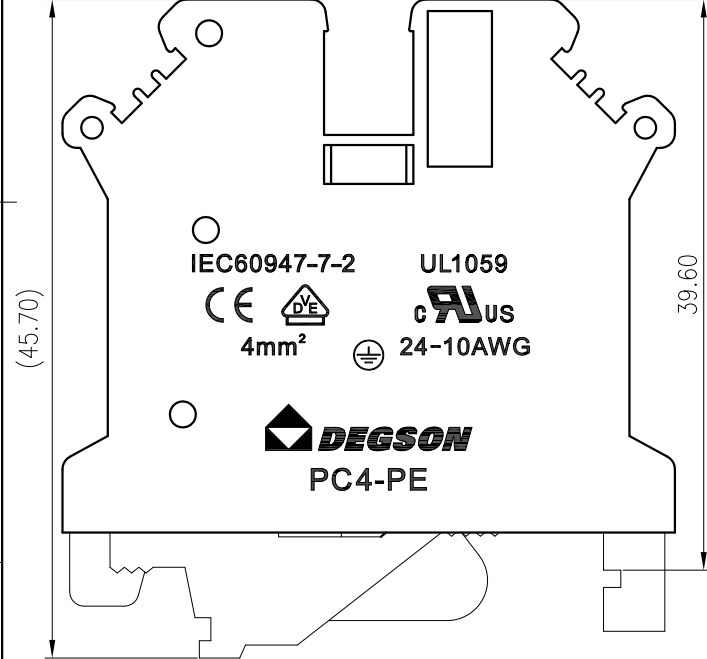


General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

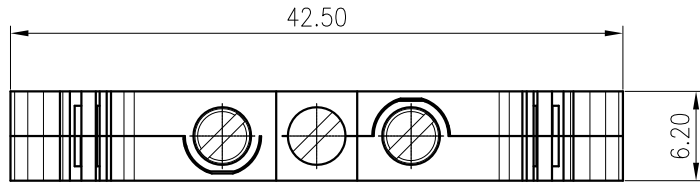

ITEM	NAME OF PART	MATERIAL	NOTES
5	Ground contact		
4	Screw	Copper Alloy	M3\Ni Plated
3	Cage	Copper Alloy	M3\Ni Plated
2	Housing	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL Standard:			
Rated Voltage(V)/Current(A)		B	C
IEC Standard:		/	/
Overvoltage Category		III/3	/
Pollution Degree		/	/
Rated Voltage(V)/Current(A)		/	/
(KV)/Rate Impulse Voltage(KV)		8.0	/
Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43	
Wire Range(rigid and flexible)(mm²/AWG)		0.2~4.0/24~10	
Pitch(mm)		6.2	
Stripping length(mm)		6~7	
Operating temperature(°C)		-40~+105	
Conform to RoHS		Yes	
Standard color number:		/	
PANTONE / RAL		/	

MATERIAL:	SURFACE:		
MAT NO.:	/		
STATUS:	/		
APPD: Li GL 2020.04.03	NAME: DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD		
CHKD: Mao J 2020.04.03	PC4-PE		
DRFT: ExpsAny 2005.11.14	DRAWING NO.:	PC4-PE-C01	REV T1
TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1	

REV	ECN	DESCRIPTION	DRFT	DATE