
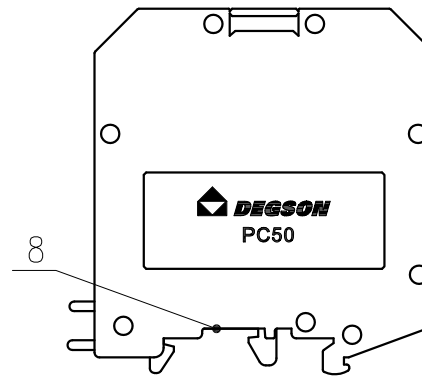
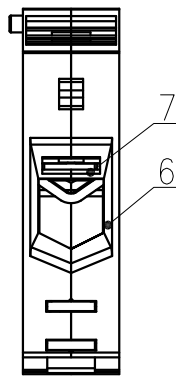
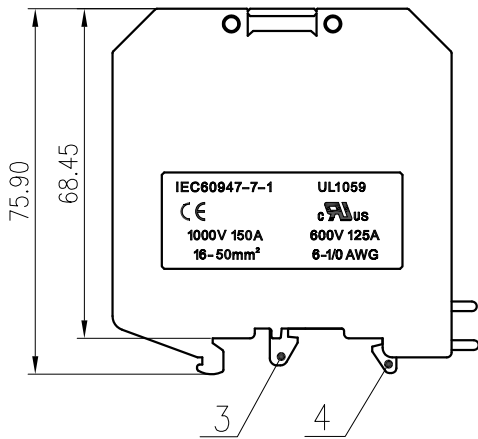


General tolerances(mm)												0.1/10 ±2'	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

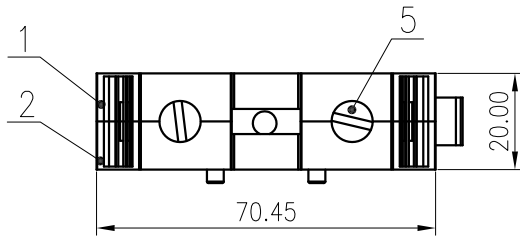

UL Standard:	B	C	D
Rated Voltage(V)/Current(A)	600/125	600/125	600/5
IEC Standard:			
Overtoltage Category	III/3	/	/
Pollution Degree			
Rated Voltage(V)/Current(A)	1000/150	/	/
Rate Impulse Voltage(KV)	8.0	/	/
Torque Tightening(N·m/Lb.in)	M6, 2.5/22.15		
Wire Range(rigid and flexible)(mm²/AWG)	16~50/6~1/0		
Pitch(mm)/Poles	20.0		
Stripping length(mm)	22~23		
Operating temperature(°C)	-40~+105		
Conform to RoHS	Yes		
Standard color number: PANTONE / RAL	/		

8	Spring	Spring steel	Ni Plated
7	Current Carrier	Copper	Sn Plated
6	Cage	Iron	Zn Plated
5	Screw	Steel	Zn Plated
4	Slip Component 2	PA66	UL94V-0
3	Slip Component 1	PA66	UL94V-0
2	Housing 2	PA66	UL94V-0
1	Housing 1	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
1			
2			

REV	ECN	DESCRIPTION	DRFT	DATE
1				

MATERIAL:	SURFACE:		
MAT NO.:	/		
STATUS:	/		
APPD: Li GL 2020.06.04	NAME: <b>DEGSON</b> NINGBO DEGSON ELECTRICAL CO., LTD		
CHKD: Mao J 2020.06.04	PC50-01P-1Y-00A(H)		
DRFT: ding 2016.01.15	DRAWING NO.:	PC50-C01	REV: T2
⊕	SIZE: A4	SCALE: 1:1.5	SHEET 1/1