
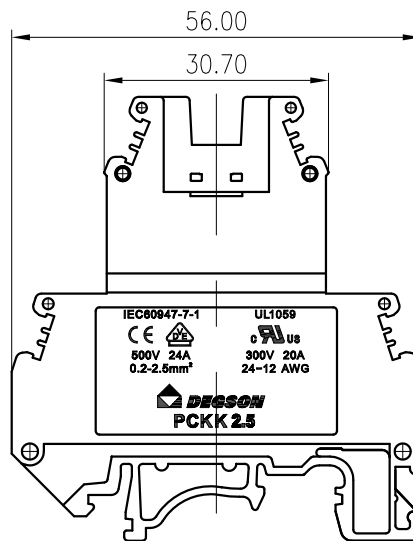
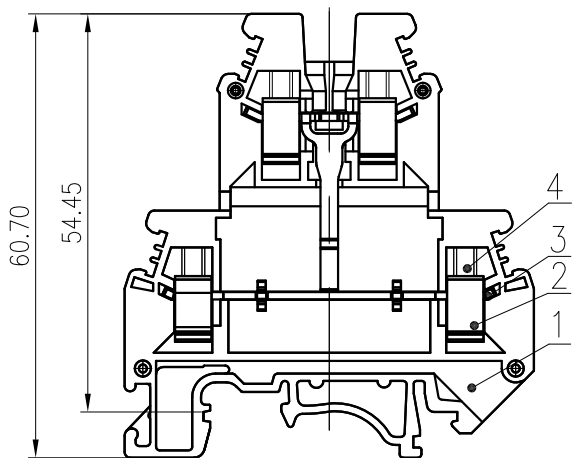


General tolerances(mm)											0.1/10 ±2'		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

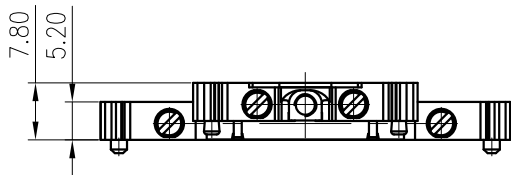

4	Screw	Copper alloy	M3/Ni Plated
3	Current carrier	Copper	Sn Plated
2	Cage	Copper alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL Standard:			
Rated Voltage(V)/Current(A)		B	C D
		300/20	/ 300/10
IEC Standard:			
Overvoltage Category		III/3	/ /
Pollution Degree			
Rated Voltage(V)/Current(A)		500/24	/ /
Rate Impulse Voltage(KV)		6	/ /
Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43	
Wire Range(rigid and flexible)(mm ² /AWG)		0.2~2.5/24~12	
Pitch(mm)		5.2	
Stripping length(mm)		8-9	
Operating temperature(°C)		-40~+105	
Conform to RoHS		Yes	
Standard color number:		/	
PANTONE / RAL		/	

MATERIAL:	SURFACE:		
MAT NO.:	/		
STATUS:	/		
APPD: Li GL 2020.04.03	NAME: PCKK2.5		
CHKD: Mao J 2020.04.03			
DRFT: Ding 2017.4.17	DRAWING NO.:	PCKK2.5-C04	REV T1
⊕	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE