



General tolerances(mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

A

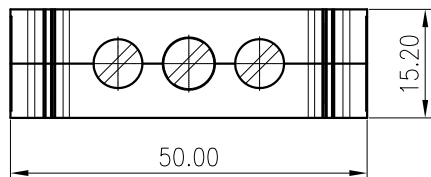


B

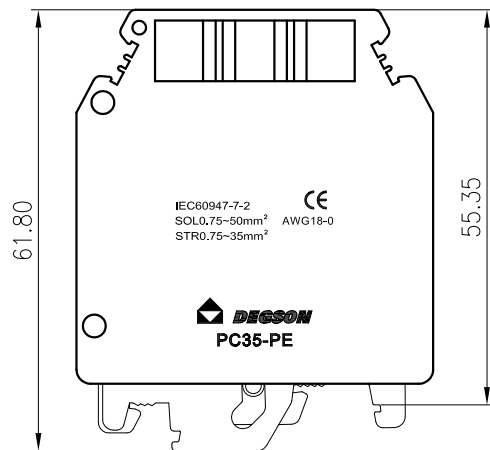


C

D

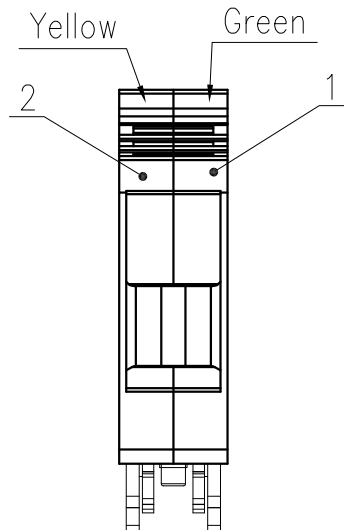

3

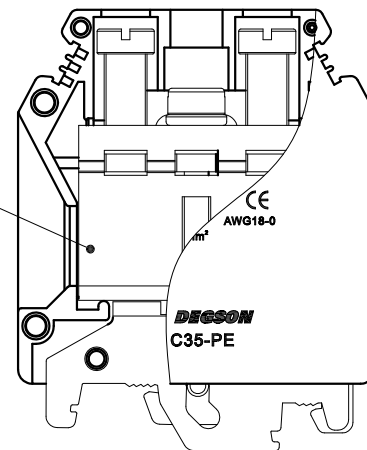

A

B

C

D

3	Ground contact		
2	Housing 2	PA66	UL94V-0
1	Housing 1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL Standard:		B	C
Rated Voltage(V)/Current(A)		/	/
IEC Standard:			
Overvoltage Category		III/3	/
Pollution Degree		/	/
Rated Voltage(V)/Current(A)		/	/
Rate Impulse Voltage(KV)		8.0	/
Torque Tightening(N·m/Lb.in)		M6, 2.5/22.15	
Wire Range(rigid and flexible)(mm²/AWG)		0.75~50(Sol)/0.75~35(Str)	
Pitch(mm)/Poles		/18-1/0	
Stripping length(mm)		15.20	
Operating temperature(°C)		18-19	
Conform to RoHS		-40~+105	
Standard color number:		Yes	
PANTONE / RAL		/	

MATERIAL:	SURFACE:		
MAT NO.:	/		
STATUS:	/		
APPD: Li GL 2020.06.04	NAME: DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD		
CHKD: Mao J 2020.06.04	PC35-PE		
DRFT: LIUM 2006.01.06	DRAWING NO.:	PC35-PE-C01	REV: T1
⊕	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

⊕	mm (inch)
---	--------------