
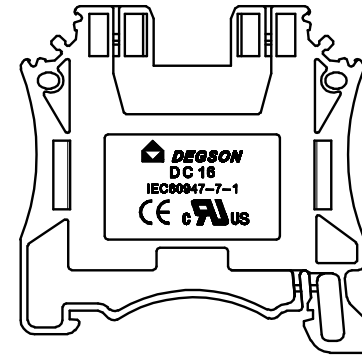



General tolerances(mm)											0.1/10 ±Z		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

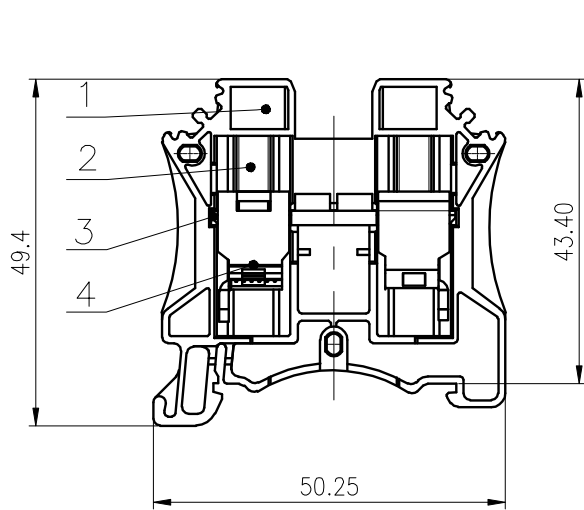

UL Standard:	B	C	D
Rated Voltage(V)/Current(A)	600/100	600/100	600/5
IEC Standard:			
Overvoltage Category	III/3	/	/
Pollution Degree			
Rated Voltage(V)/Current(A)	1000/76	/	/
(KV)/Rate Impulse Voltage(KV)	8.0	/	/
Torque Tightening(N·m/Lb.in)	M5, 2.5/27		
Wire Range(rigid and flexible)(mm ² /AWG)	1.5~25/14~3(Str) 14~10(Sol)		
Pitch(mm)	12.0		
Stripping length(mm)	12~13		
Operating temperature(°C)	-40~+105		
Conform to RoHS	Yes		
Standard color number:	/		
PANTONE / RAL	/		

MATERIAL: /	SURFACE: /		
MAT NO.: /	NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: Li GL 2020.05.25	NAME: DC16-01P-1Y-00A(H)		
CHKD: Mao J 2020.05.25	DRAWING NO.: DC16-C01		
DRFT:Wang LX 2020.05.25	REV TO-2		
SIZE: A4 SCALE: 1:1 SHEET 1/1	TYPE: CUSTOMER DRAWING		

4	Cage	Steel	Zn Plated
3	Current carrier	Copper	Sn Plated
2	Screw	Steel	M5\Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES