



General tolerances(mm)											0.1/10 ±2'		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50


A

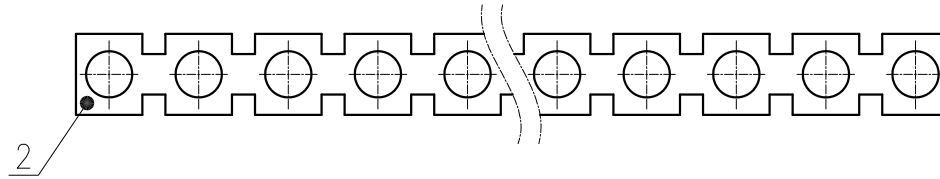

B

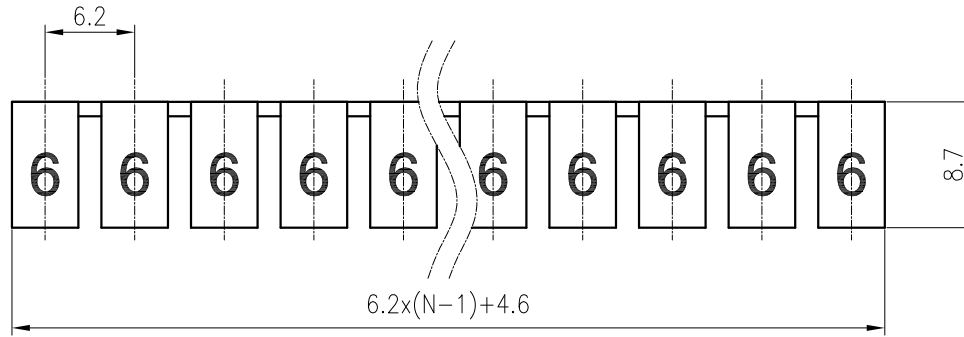

C

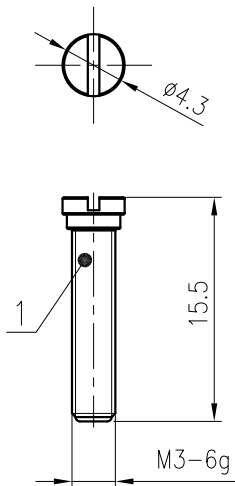

D

2	Current carrier	Copper	Sn Plated
1	Screws	Copper alloy	Ni Plated
ITEM	PART NAME	MATERIAL	NOTES
Torque Tightening(N·m/Lb.in)		M3,0.5/4.43	
Pitch(mm)/Poles		6.2/N=02P~10P	
Operating temperature(°C)		-40~+105	
Current carrier and Screws should be packed individually, which must be put in the same box			
Conform to RoHS			Yes

MATERIAL:	/	SURFACE:	/	
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS:	/			
APPD:	Li GL 2020.06.04	NAME:		
CHKD:	Mao J 2020.06.04	FBI10-6		
DRFT:	Chen K 2020.06.04			
DRAWING NO.:		FBIXX-6-C01	REV	T1
TYPE: CUSTOMER DRAWING		SCALE: 2:1	SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE