



General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	

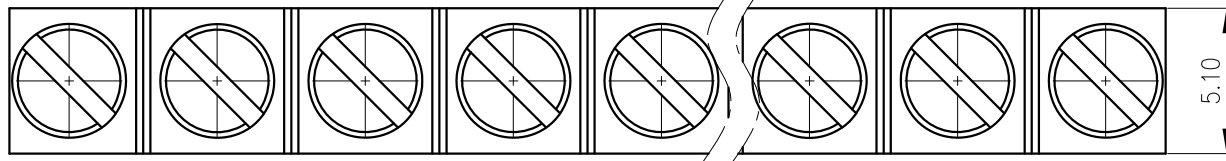

$$5.2X(N-1)+4.2$$

5.20

15.30

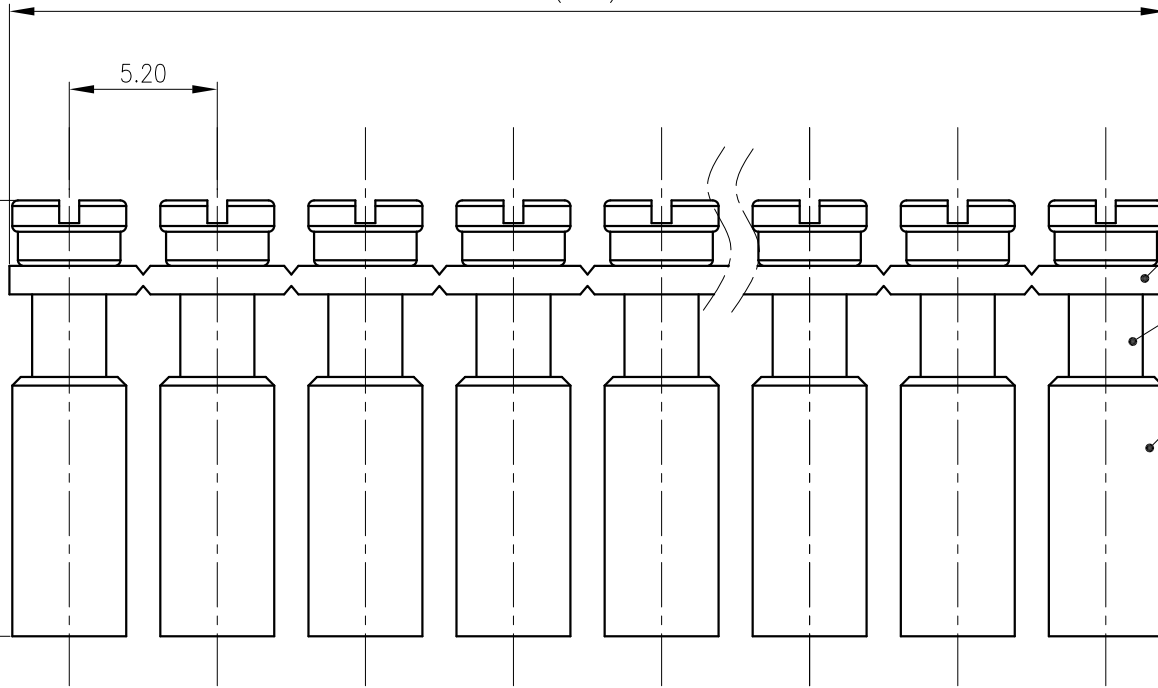

3	Pillar	Copper Alloy	M3/Ni Plated
2	Screws	Copper Alloy	M3/Ni Plated
1	Current carrier	Copper	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES
UL Standard:		B	C
Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43	
Pitch(mm)/Poles		5.20/N=02~10P	
Operating temperature(°C)		-40~+105	
Conform to RoHS		Yes	

MATERIAL:	SURFACE:		
MAT NO.:	/		
STATUS:	/		
APPD: Li GL 2020.06.06	NAME:		
CHKD: Mao J 2020.06.06	FBR1 10-5		
DRFT: Feng X 2020.05.22	DRAWING NO.:	FBR1 10-5-C01	REV TO
⊕	SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING
		SCALE: 4:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE