





<b>Product</b>	Potentiometer
<b>Dia</b>	22 mm
<b>Dielectric Strength (Contact-Contact)</b>	1750 Vrms
<b>Isolation Resistance</b>	10 MΩ min. (500V DC)
<b>Operating Temperature</b>	-15 / + 80 °C
<b>Pollution Degree</b>	3
<b>Protection Degree</b>	IP65
<b>Cable Section</b>	0.75-1.5 mm <sup>2</sup>
<b>Screw Torque</b>	1,5 Nm
<b>Maximum Current</b>	12,20 mA
<b>Maximum Power</b>	1,5 W (70°C)
<b>Resistive Value</b>	10 kΩ
<b>Spin Angle</b>	270°
<b>Serial</b>	B Series Plastic
<b>Specifications</b>	Non-flammable V0 PA6.6
	Variety of impedances
	IP65 protection from front side
<b>Standards / Certificates</b>	IEC 60393-1



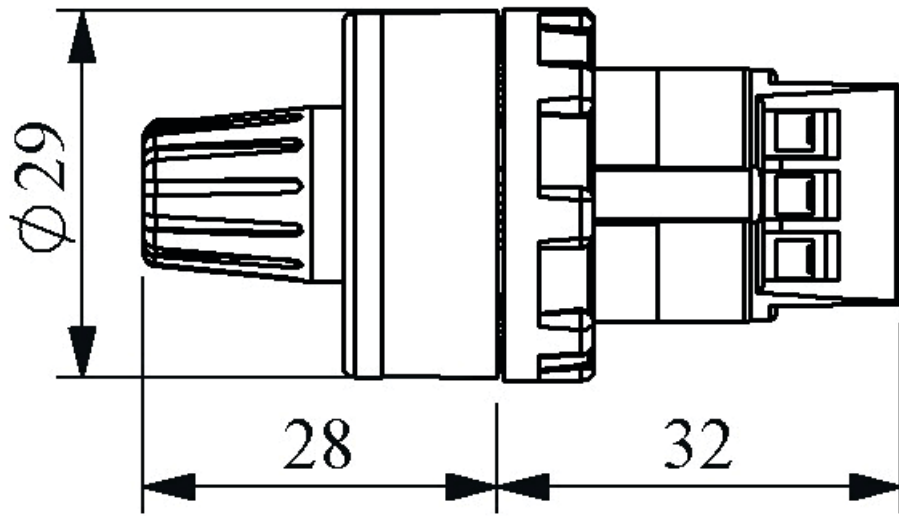

Montage scale  $\phi 22.4 \pm 0.2$  mm

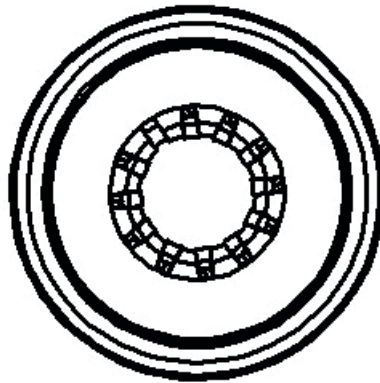

Circuit diagram

