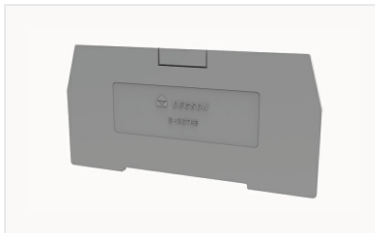


Overview

Product information

**D-DCTK6-11060000001**

End cover, Width: 1.5 mm, Color: gray

Product certification



Technical data

Product drawing

3D model

[□](#)

Environmental conditions

Ambient temperature (operation)	-40 °C ~ 85 °C
Ambient temperature (storage / transport)	-5 °C ~ 70 °C
Ambient temperature (assembly)	-5 °C ~ 70 °C
Ambient temperature (execution)	-5 °C ~ 70 °C
Relative humidity (storage/transport)	25%~75%

Environmental protection

REACH SVHC	Lead 7439-92-1
RoHS	No excessive harmful substances

Dimension

width	1.5mm
-------	-------

Overview





Insulation Materials	PA
Flame retardant grade, in line with UL 94	V0
color	Gray

Accessories

Business data

Order number	11060000001
Packing unit	50
Minimum order quantity	50
Products weight (without packaging)	3.84

General tolerances(mm)													0.1/10 IT7
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~	~	~	~	~	~	~	~	~	~	~	~	~	
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

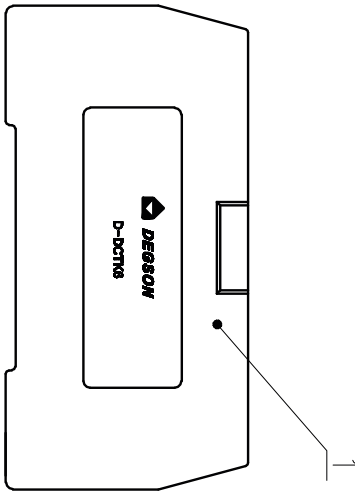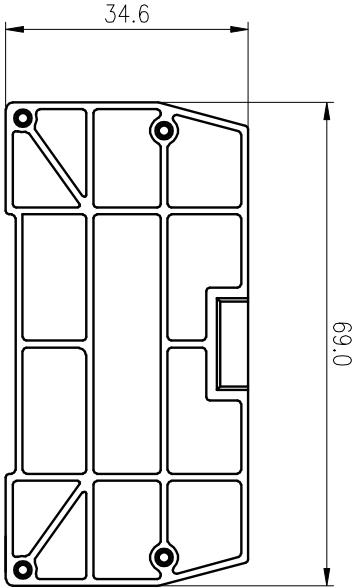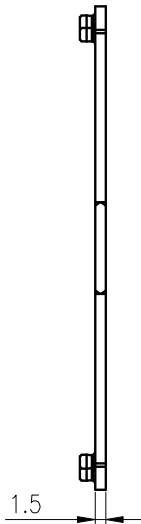

1	Cover	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
Operating temperature(°C)			
Conform to RoHS			
Standard color number:			
PANTONE / RAL			

SURFACE: /			
------------	--	--	--

MATERIAL: /			
MAT NO.: /			
STATUS: /			
APPD: L! GL 2020.06.01			
NAME: D-DCTK6-01P-1Y-00A(H)			
CHKD: Mao J 2020.06.01			
DRAWING NO.: D-DCTK6-C01			
DRAFT:Wang LX 2020.06.01			
TYPE: CUSTOMER DRAWING			
SCALE: 1:1			
REV TO-1			
SHEET 1/1			

REV	ECN	DESCRIPTION	DRAFT	DATE
-----	-----	-------------	-------	------

SIZE:A4	mm (inch)
---------	-----------

TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET 1/1
------------------------	------------	-----------