


Overview

Product information



D-DS4-HE-11040000165

End cover, Width: 1.5 mm, Color: black

Product advantages

Product certification

Technical data

Product drawing

3D model

□

Overview

Insulation Materials

PA

Flame retardant grade, in line with UL 94

V0

color

black

Dimension

width

1.5mm

Height

28.45mm

length

55.6mm

Environmental conditions

Ambient temperature (operation)

-40 °C ~ 105 °C (depending on derating curve)

Relative humidity (storage/transport)

25%~75%

Ambient temperature (storage / transport)

-25°C~60°C

Environmental protection






RoHS	No excessive harmful substances
REACH SVHC	Lead 7439-92-1

Accessories

Business data

Order number	11040000165
Packing unit	100
Minimum order quantity	100
Products weight (without packaging)	1.77

公差表/General tolerances(mm)														0.1/1/0
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		D ±T
~	~	~	~	~	~	~	~	~	~	~	~	~	>500	
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.28	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

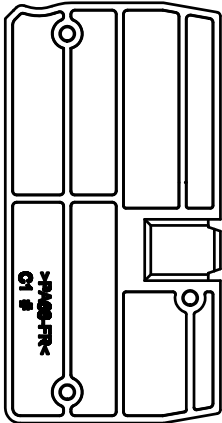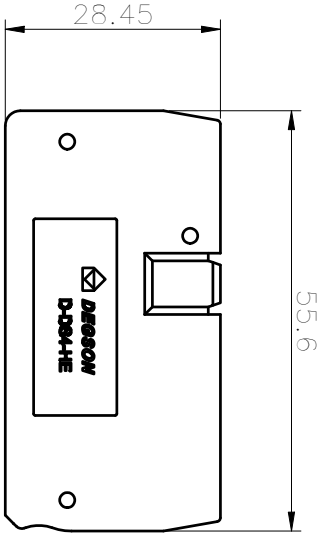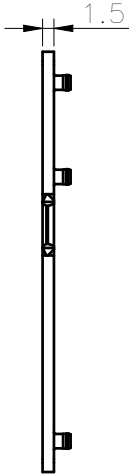

00	/		Chen KZ	2022.06.07
REV	ECN	DESCRIPTION	DRAFT	DATE
			A4	

DESSON		NAME	
APPR	Peng M	2022.06.07	
CHKD	Gao WG	2022.06.07	
DRAFT	Chen KZ	2022.06.07	
DRAWING NO.		D-DS4-HE-01P-1Y-00A(H)	
TYPE		CUSTOMER DRAWING	
DRAWING STATUS		/	
SCALE		2:1	
SHEET		1/1	

使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS 环保要求/Conform to RoHS	Yes
阻燃等级/Flame class	UL94-V0

MATERIAL: PM66	SURFACE: /
MAT NO./REV: /	MAT STATUS: /