

Overview

Product information



DFA2.5-03P-92119900007

Bridge, Spacing: 5.1 mm, Color: gray

Product advantages

- ✓ Plug-in bridge. Flexible circuit connection can be realized;

Product certification

Technical data

Product drawing

3D model

□

Overview

Insulation Materials	PA
Flame retardant grade, in line with UL 94	V0
Number of potentials	3
color	Gray

Dimension

spacing	5.1mm
---------	-------

Environmental conditions

Ambient temperature (operation)	-40 °C ~ 105 °C (depending on derating curve)
Relative humidity (storage/transport)	25%~75%
Ambient temperature (storage / transport)	-25°C~60°C

Environmental protection



RoHS	No excessive harmful substances
REACH SVHC	Lead 7439-92-1

Accessories

Business data

Order number	92119900007
Packing unit	100
Minimum order quantity	100
Products weight (without packaging)	1.275

公差/General tolerances(mm)													D
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500	Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	
													±Z

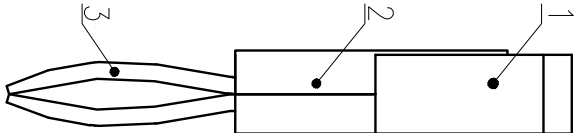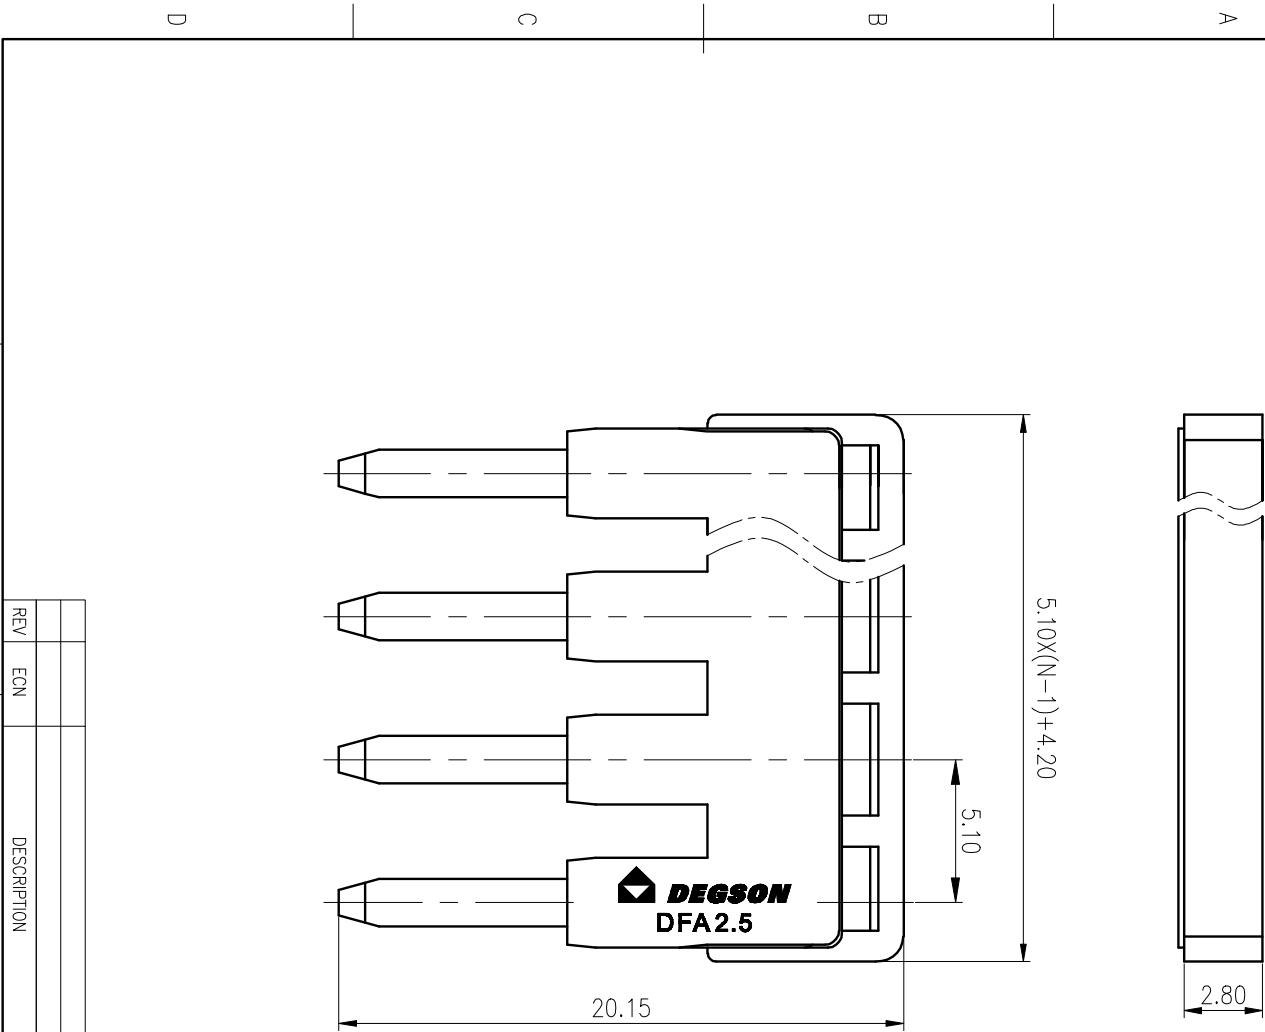

MATERIAL: /		SURFACE: /	
MAT NO.: /			
STATUS: /			
APPD: Li GL 2020.06.04		NAME: DFA2.5-XXP-1Y-00A(H)	
CHKD: Moo J 2020.06.04			
DFT:ZhengQC 2020.06.04		DRAWING NO.: DFA2.5-C01	
DFT:ZhengQC 2020.06.04		TYPE: CUSTOMER DRAWING	
SIZE: A4		SCALE: 4:1	
REV		REV	
ECN		T0	
DESCRIPTION		SHEET	
REV		1/1	

3	Bridgware	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数/Rows		5.10/N=02~10P	
使用温度范围/Operating Temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD