


Overview

Product information



DFA4-03P-92119900017

Bridge, Spacing: 6.1 mm, Color: gray

Product advantages

- ☑ Plug-in bridge. Flexible circuit connection can be realized;

Product certification

Technical data

Product drawing

3D model

□

Overview

Insulation Materials	PA
Flame retardant grade, in line with UL 94	V0
Number of potentials	3
color	Gray

Dimension

spacing	6.1mm
---------	-------

Environmental conditions

Ambient temperature (operation)	-40 °C ~ 105 °C (depending on derating curve)
Relative humidity (storage/transport)	25%~75%
Ambient temperature (storage / transport)	-25°C~60°C

Environmental protection




RoHS	No excessive harmful substances
REACH SVHC	Lead 7439-92-1

Accessories

Business data

Order number	92119900017
Packing unit	100
Minimum order quantity	100
Products weight (without packaging)	1.381

公差/General tolerances(mm)													D
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~	~	~	~	~	~	~	~	~	~	~	~	~	>500
3	6	10	18	30	50	80	120	180	250	315	400	500	Z
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													
±Z													±Z

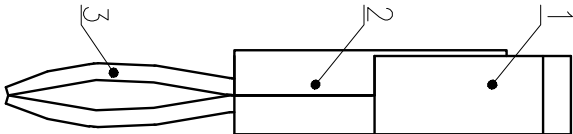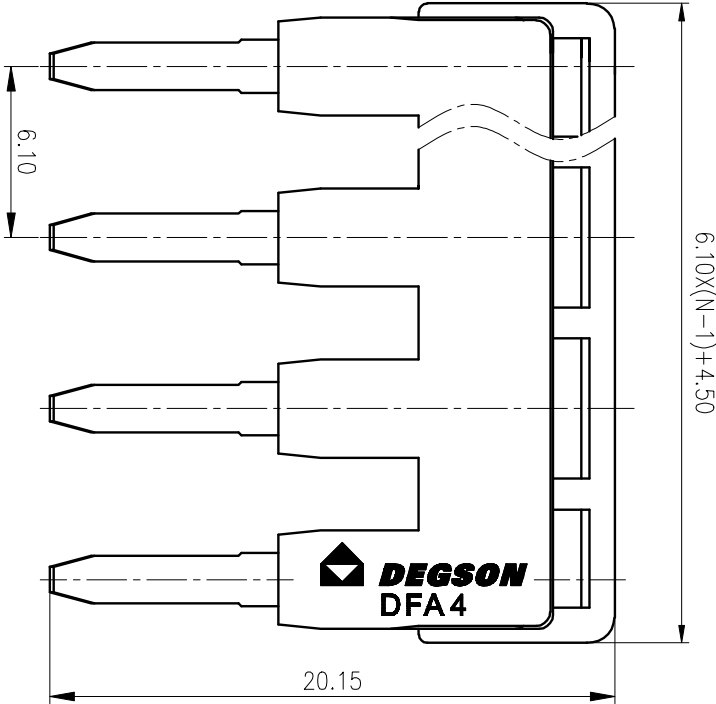

3	Bridgeware	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线距范围/Poles			
使用温度范围/Operating Temperature(°C)			
符合RoHS环保要求/Conform to RoHS			

MATERIAL: / SURFACE: /

MAT NO.: /
STATUS: /
NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

APPD: Li GL 2020.06.04
CHKD: Moo J 2020.06.04
NAME: **DFA4-XXP-1Y-00A(H)**

DRAWING NO.: DFA4-C01
DRAFT: ZhengQC 2020.06.04
TYPE: CUSTOMER DRAWING
SCALE: 4:1
REV T0
SHEET 1/1