


Overview

Product information

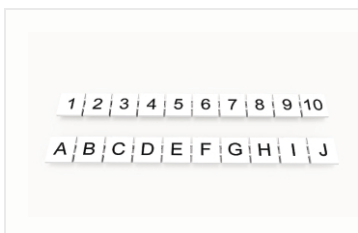

ZB10-92118900024

Plug-in bridge, pitch: 18.1 mm, Number of potentials: 2

Product advantages

- ☒ Can mark numbers, letters, etc. to prevent wiring errors

Product certification

Technical data

Product drawing

3D model

□

Environmental conditions

Ambient temperature (operation)	-40 °C ~ 85 °C
Ambient temperature (storage / transport)	-5 °C ~ 70 °C
Ambient temperature (assembly)	-5 °C ~ 70 °C
Ambient temperature (execution)	-5 °C ~ 70 °C
Relative humidity (storage/transport)	25%~75%

Environmental protection

REACH SVHC	Lead 7439-92-1
RoHS	No excessive harmful substances

Dimension

spacing	10.3mm
---------	--------

lettering field size	9.3X10.7mm
width	10.7mm

Overview



Number of potentials	10
Insulation Materials	PA
Flame retardant grade, in line with UL 94	V0
color	White

Accessories

Business data

Order number	92118900024
Packing unit	200
Minimum order quantity	200
Products weight (without packaging)	1.99

General tolerances(mm)													D
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±2

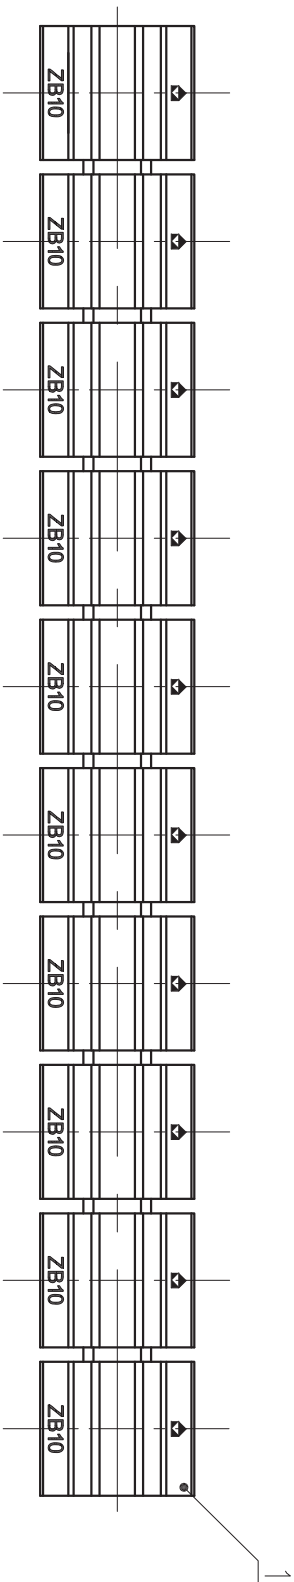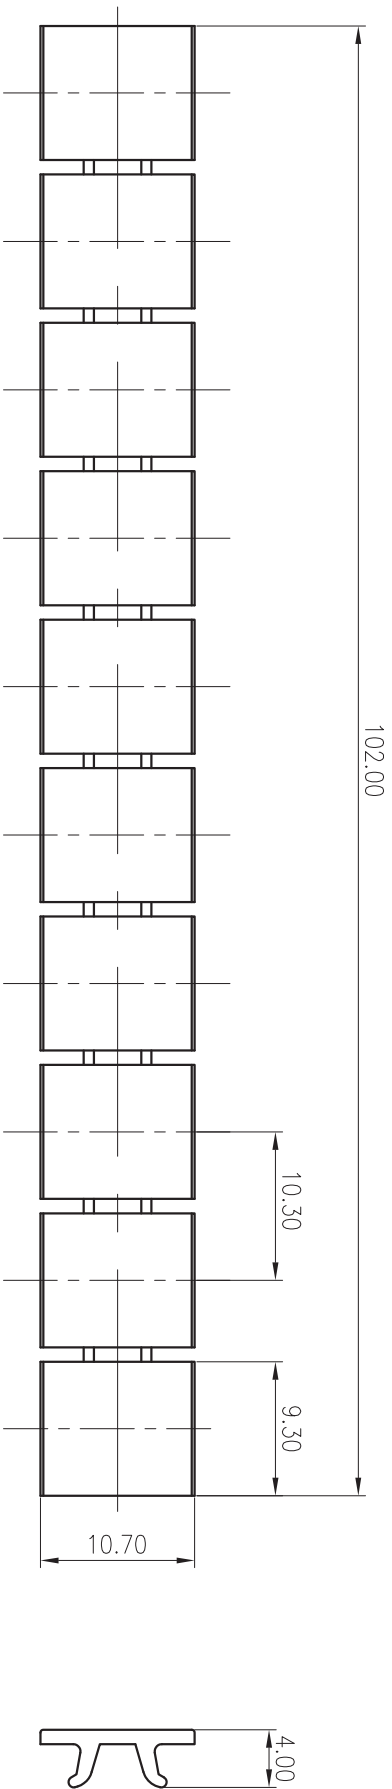

1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
Pitch(mm)/Poles	10.50/10P		
Operating temperature(°C)	-40~+105		
Conform to RoHS	Yes		

MATERIAL:	SURFACE:
-----------	----------

MAT. NO.:	/
STATUS:	/



DEGSON®

DEGSON GERMANY GmbH

NAME:									
ZB10-10P-1Y-00A(H)									
APPD: Li GL 2020.06.06									
CHKD: Mao J 2020.06.06									
DRT: Feng X 2020.05.30									
DRAWING NO.: ZB10-C01									
REV TO									
TYPE: CUSTOMER DRAWING									
SCALE: 2:1									
SHEET 1/1									
DATE									
DRT									
DESCRIPTION									
ECN									
REV									