

CanTak®

SECCIONADOR 0-1

LW26-40GS-61002 (2P)

- **Categoría de Producto:** Interruptor Rotativo
- **Corriente de Trabajo:** 40A
- **Panel:** 48x48mm (enclavamiento en puerta)
- **Código de Diagrama:** 61002 (2P)
- **Color:** Rojo / Amarillo / Negro / Azul
- **Manilla:** Tipo GS
- **Grado de Protección:** IP20
- **Certificaciones:** TUV, CE, RoHS, CCC



ESPECIFICACIONES

Especificaciones	LW26-40GS			
Tensión de Aislamiento designada	660/690 V			
Corriente Nominal Térmica	40A			
Tensión Nominal de Trabajo				440V
CORRIENTE NOMINAL DE TRABAJO				
AC-21A				40
AC-22A				40
AC-23A				37
POTENCIA				
AC-23A				18.5



www.isaindustrial.com



+51 977 646 393



ventas@isaindustrial.com

CanTak®

SECCIONADOR 0-1

LW26-40GS-61002 (2P)



DIMENSIONES E INSTALACIÓN


Front view of the switch showing the OFF position. The width is labeled A and the height is labeled C.

Side view of the switch showing dimensions L and H. A note indicates 1-5 (thickness of the installing plate).

Installation diagram showing dimensions E, F, D1, and D2. D1 and D2 are the distances from the center of the switch to the mounting holes.

Specification	Escutheon plate	Dimensions (mm)				Installation (mm)			
		A	C	L	H	E	F	D1	D2
LW26GS-20/04-1	M1	□48	43	42	33	36	36	∅ 8.5	∅ 4.5
LW26GS-20/04-2	M2	□64	43	43	42	48	48	∅ 10	∅ 4.5
LW26GS-25/04-1	M1	□48	45.2	50	33	36	36	∅ 8.5	∅ 4.5
LW26GS-25/04-2	M2	□64	45.2	51	42	48	48	∅ 10	∅ 4.5
LW26GS-32/04-2	M2	□64	58	55	42	48	48	∅ 10	∅ 4.5
LW26GS-32/04-3	M3	□88	58	55	52	68	68	∅ 13	∅ 6
LW26GS-40/04-2	M2	□64	58	55	42	48	48	∅ 10	∅ 4.5
LW26GS-40/04-3	M3	□88	58	55	52	68	68	∅ 13	∅ 6
LW26GS-63/04-2	M2	□64	66	72.5	42	48	48	∅ 10	∅ 4.5
LW26GS-63/04-3	M3	□88	66	72.5	52	68	68	∅ 13	∅ 6

DIAGRAMA

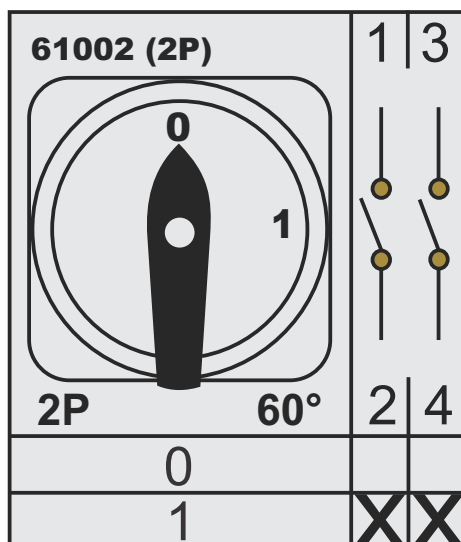

www.isaindustrial.com



+51 977 646 393



ventas@isaindustrial.com