

CanTak®

SECCIONADOR 0-1

LW26-63GS-61004 (4P)

- **Categoría de Producto:** Interruptor Rotativo
- **Corriente de Trabajo:** 63A
- **Panel:** 48x48mm (enclavamiento en puerta)
- **Código de Diagrama:** 61004 (4P)
- **Color:** Rojo / Amarillo / Negro / Azul
- **Manilla:** Tipo GS
- **Grado de Protección:** IP20
- **Certificaciones:** TUV, CE, RoHS, CCC



ESPECIFICACIONES

Especificaciones	LW26-63GS			
Tensión de Aislamiento designada	660/690 V			
Corriente Nominal Térmica	63A			
Tensión Nominal de Trabajo				440V
CORRIENTE NOMINAL DE TRABAJO				
AC-21A				63
AC-22A				63
AC-23A				57
POTENCIA				
AC-23A				30



www.isaindustrial.com



+51 977 646 393



ventas@isaindustrial.com

CanTak®

SECCIONADOR 0-1

LW26-63GS-61004 (4P)



DIMENSIONES E INSTALACIÓN


Front view of the switch showing the OFF position. Dimension A is the width of the switch body, and dimension C is the height of the switch body.

Side view of the switch showing dimensions L (length of the switch body) and H (height of the switch body). A note indicates 1-5(thickness of the installing plate).

Installation diagram showing dimensions E (horizontal distance between mounting holes), F (vertical distance between mounting holes), D1 (distance from mounting hole to center of switch), and 4-D2 (distance from mounting hole to center of switch).

Specification	Escutheon plate	Dimensions (mm)				Installation (mm)			
		A	C	L	H	E	F	D1	D2
LW26GS-20/04-1	M1	□48	43	42	33	36	36	∅ 8.5	∅ 4.5
LW26GS-20/04-2	M2	□64	43	43	42	48	48	∅ 10	∅ 4.5
LW26GS-25/04-1	M1	□48	45.2	50	33	36	36	∅ 8.5	∅ 4.5
LW26GS-25/04-2	M2	□64	45.2	51	42	48	48	∅ 10	∅ 4.5
LW26GS-32/04-2	M2	□64	58	55	42	48	48	∅ 10	∅ 4.5
LW26GS-32/04-3	M3	□88	58	55	52	68	68	∅ 13	∅ 6
LW26GS-40/04-2	M2	□64	58	55	42	48	48	∅ 10	∅ 4.5
LW26GS-40/04-3	M3	□88	58	55	52	68	68	∅ 13	∅ 6
LW26GS-63/04-2	M2	□64	66	72.5	42	48	48	∅ 10	∅ 4.5
LW26GS-63/04-3	M3	□88	66	72.5	52	68	68	∅ 13	∅ 6

DIAGRAMA

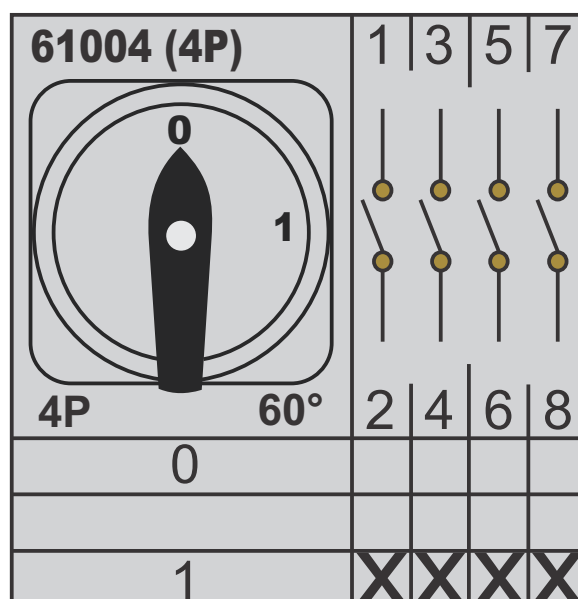

www.isaindustrial.com



+51 977 646 393



ventas@isaindustrial.com