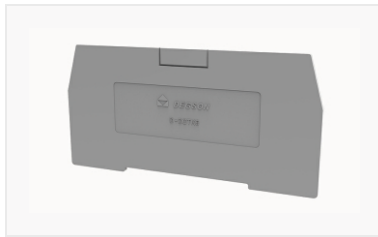


**Product information**

**D-DCTK6-11060000001**

End cover, Width: 1.5 mm, Color: gray

**Product certification**

**TECHNICAL DATA**
**Environmental conditions**

<b>Ambient temperature (operation)</b>	-40 °C ~ 85 °C
<b>Ambient temperature (storage / transport)</b>	-5 °C ~ 70 °C
<b>Ambient temperature (assembly)</b>	-5 °C ~ 70 °C
<b>Ambient temperature (execution)</b>	-5 °C ~ 70 °C
<b>Relative humidity (storage/transport)</b>	25%~75%

**Environmental protection**

<b>REACH SVHC</b>	Lead 7439-92-1
<b>RoHS</b>	No excessive harmful substances

**Dimension**

<b>width</b>	1.5mm
--------------	-------





**Overview**

<b>Insulation Materials</b>	PA
<b>Flame retardant grade, in line with UL 94</b>	V0
<b>color</b>	Gray

## BUSINESS DATA

<b>Order number</b>	11060000001
<b>Packing unit</b>	50
<b>Minimum order quantity</b>	50
<b>Products weight (without packaging)</b>	3.84

General tolerances(mm)		D	
0	>3	~	0.1/10
~	3	~	~
3	6	~	~
6	10	~	~
10	18	~	~
18	30	~	~
30	50	~	~
50	80	~	~
80	120	~	~
120	180	~	~
180	250	~	~
250	315	~	~
315	400	~	~
400	500	~	~
500	>500	~	~
>500		~	~
ED17	ED18	ED22	ED25
±0.26	±0.31	±0.37	±0.57
±0.80	±0.93	±1.05	±1.19
±1.60	±2.20	±2.50	

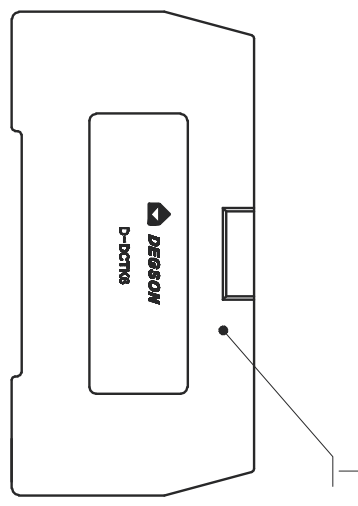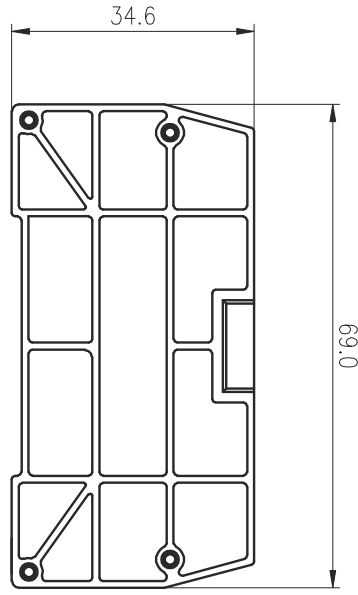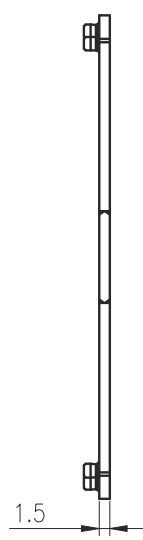

ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover	PA66	UL94V-0
Operating temperature(°C)			
-40~+105			
Conform to RoHS			
Yes			
Standard color number:			
PANTONE / RAL			
SURFACE: /			

MATERIAL: /  
 MAT NO.: /  
 STATUS: /  
 APPD: LI GL 2020.06.01  
 CHKD: Mao J 2020.06.01  
 DRFT:Wang LX 2020.06.01

**DEGSON®** **DEGSON GERMANY GmbH**  
 NAME: **D-DCTK6-01P-1Y-00A(H)**  
 DRAWING NO.: D-DCTK6-C01

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	SCALE: 1:1	SHEET 1/1
					mm (inch)		TO-1