

**Product information**

**DFB10-8.2-11060000411**

Bridge, Spacing: 8.2 mm, Color: blue

**Product advantages**
 Plug-in bridge, Flexible circuit connection can be realized

**Product certification**

## TECHNICAL DATA

**Overview**

<b>Insulation Materials</b>	PA
<b>Flame retardant grade, in line with UL 94</b>	V0
<b>Number of potentials</b>	10
<b>color</b>	blue

**Dimension**

<b>spacing</b>	8.2mm
----------------	-------

**Environmental conditions**





<b>Ambient temperature (operation)</b>	-40 °C ~ 105 °C ( depending on derating curve )
<b>Relative humidity (storage/transport)</b>	25%~75%
<b>Ambient temperature (storage / transport)</b>	-25°C~60°C

**Environmental protection**



<b>RoHS</b>	No excessive harmful substances
<b>REACH SVHC</b>	Lead 7439-92-1

## BUSINESS DATA

<b>Order number</b>	11060000411
<b>Packing unit</b>	50
<b>Minimum order quantity</b>	50
<b>Products weight (without packaging)</b>	14.13

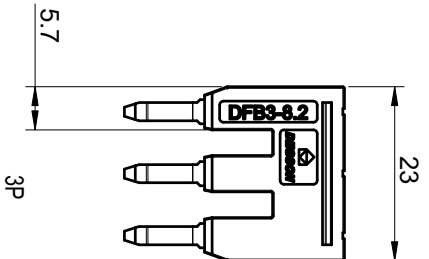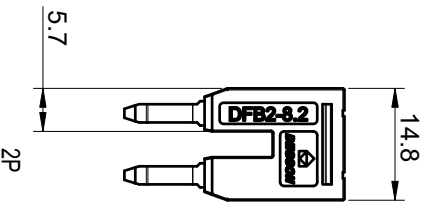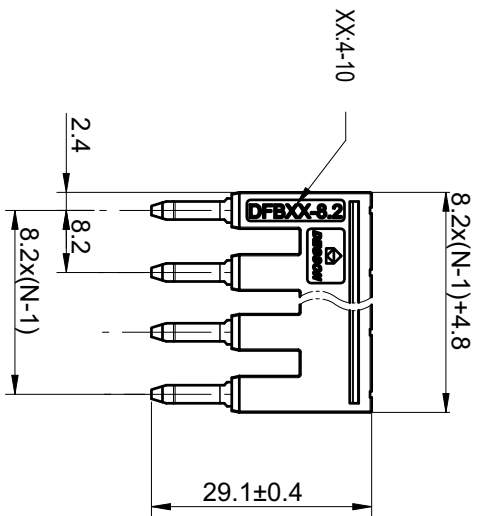

General tolerances (mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	
+0.12	+0.18	+0.22	+0.26	+0.31	+0.37	+0.57	+0.80	+0.93	+1.05	+1.15	+1.60	+2.20	+2.50



ITEM	NAME OF PART	MATERIAL	NOTES
2	Current carrier	Copper	Sn_Plated
1	Housing	PAG6	UL94V_0

Pitch(mm)/Poles	8.2/4~2~10P
Operating temperature(°C)	-40~+105
Conform to RoHS	Yes

<b>DEGSON</b>	
MATERIAL: /	SURFACE: /
MAT NO./REV: /	MAT STATUS: /

Appd: Peng M	2022.06.13	NAME	DFBXX-8.2-1Y-00A(H)
CHKD: Gao WG	2022.06.13	DRAWING NO.	
DRET: Liu Y	2022.06.13	TYPE	CUSTOMER DRAWING
DRET: Liu Y	2022.06.13	SCALE	1:1
AA	(mm)	DRAWING STATUS	1/1

00	/	DESIGN	DATE
REV	ECN	DRET	DATE