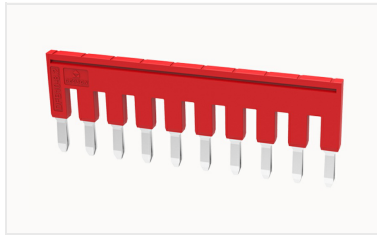


Product information

DFB10-8.2-11060000411

Bridge, Spacing: 8.2 mm · Color: red

Product advantages
 Plug-in bridge, Flexible circuit connection can be realized

Product certification

TECHNICAL DATA

Overview

Insulation Materials	PA
Flame retardant grade, in line with UL 94	V0
Number of potentials	10
color	red

Dimension

spacing	8.2mm
----------------	-------

Environmental conditions

Ambient temperature (operation)	-40 °C ~ 105 °C (depending on derating curve)
Relative humidity (storage/transport)	25%~75%
Ambient temperature (storage / transport)	-25°C~60°C

Environmental protection

RoHS	No excessive harmful substances
REACH SVHC	Lead 7439-92-1

BUSINESS DATA

Order number	11060000411
Packing unit	50
Minimum order quantity	50
Products weight (without packaging)	14.13



General (tolerances:mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.170
~	~	~	~	~	~	~	~	~	~	~	~	~	~	42°
3	6	10	18	30	50	80	120	180	250	315	400	500	~	
+0.12	+0.18	+0.22	+0.26	+0.31	+0.37	+0.57	+0.80	+0.98	+1.05	+1.15	+1.60	+2.20	+2.50	

2

3

4

5







6

A

B

C

D

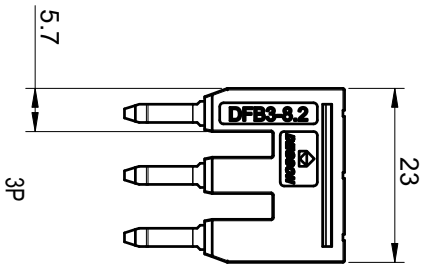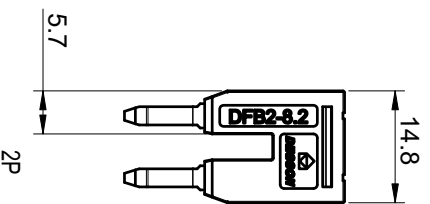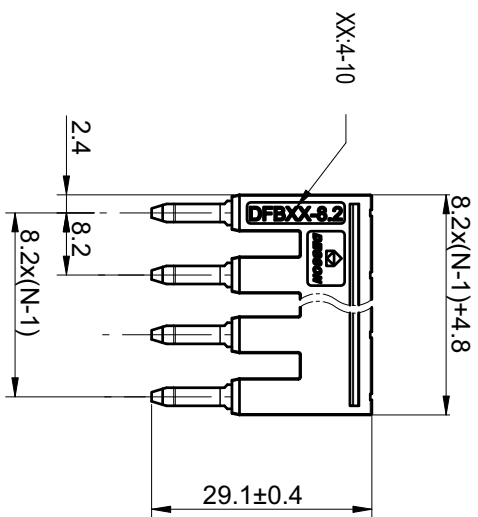

ITEM	NAME OF PART	MATERIAL	NOTES
2	Current carrier	Copper	Sn-Plated
1	Housing	PA66	UL94V_0

Pitch(mm) Pales 8.2/N=2~10P
 Operating temperature(°C) -40~+105
 Conform to RoHS

DEGSON
 MATERIAL: / SURFACE: /
 MAT NO./REV: / MAT STATUS: /

APPR: Peng M 2022.06.13
 CHKO: Gao WG 2022.06.13
 DFT: Liu Y 2022.06.13
 DFT: Liu Y A4
 NAME: DFBXX-8.2-1Y-00A(H)
 DRAWING NO. CUSTOMER DRAWING
 TYPE: CUSTOMER DRAWING
 DRAWING STATUS: /
 SCALE: 1:1
 SHEET: 1/1

REV	ECN	DESCRIPTION	DFT	DATE
00	/	/	Liu Y	2022.06.13

1 2 3 4 5 6