

**Product information**

**FB10-RTK/S-92119900098**

Bridge, Spacing: 8.2 mm

**Product advantages**

- Screw type bridge · Flexible circuit connection can be realized ;

**Product certification**

## TECHNICAL DATA

**Overview**
**Number of potentials**

10

**Dimension**
**spacing**

8.2mm

**Environmental conditions**
**Ambient temperature (operation)**

-40 °C ~ 105 °C ( depending on derating curve )

**Relative humidity (storage/transport)**

25%~75%

**Ambient temperature (storage / transport)**

-25°C~60°C

**Environmental protection**
**RoHS**

No excessive harmful substances

**REACH SVHC**

Lead 7439-92-1

## BUSINESS DATA

**Order number**

92119900098

**Packing unit**

10




**Minimum order quantity**

10

**Products weight  
(without packaging)**

24.14

General tolerances (mm)		0.1/10 ±2'
0	>3	
~	>3	~
3	>3	~
6	>6	~
10	>10	~
18	>18	~
30	>30	~
50	>50	~
80	>80	~
120	>120	~
180	>180	~
250	>250	~
315	>315	~
400	>400	~
500	>500	~
±0.12	±0.22	±2.50

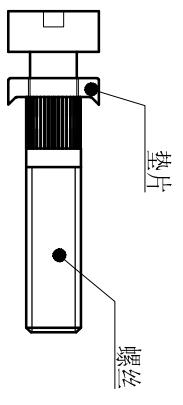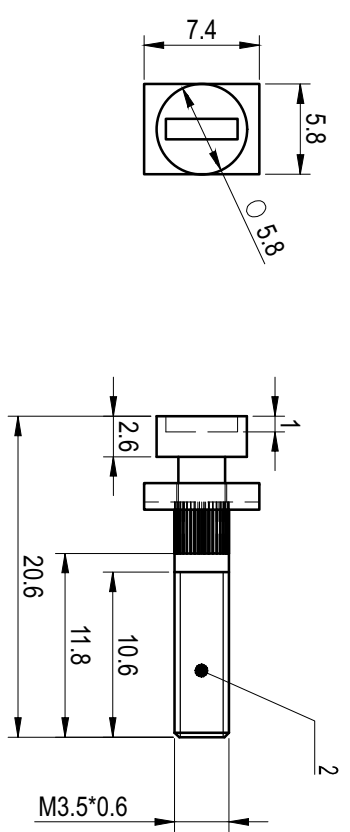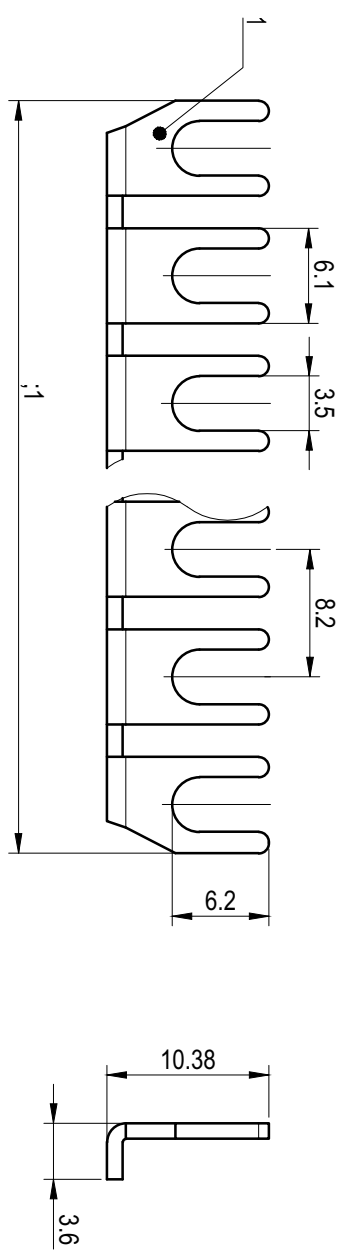

ITEM	NAME OF PART	MATERIAL	NOTES
2	Screw	Copper alloy	Ni plated
1	Fixed Bridge	Copper	Sn plated

Torque Tightening(N·m/Lb·in)  
Pitch(mm)/Poles  
8.2/N=02~10P  
Conform to RoHS

<b>DIAGON</b>	APPD: PengM	2022.06.20
	CHKD: GaoWG	2022.06.20
	DFTI: XieXD	2022.06.20
	DRAWING NO.	FBI0-RTK/S
	TYPE	CUSTOMER DRAWING
	DRAWING STATUS	
	SCALE	2:1
	SHEET	1/1

REV	ECN	DESCRIPTION	DATE
00	/		2022.06.20