

Product information

FBRI6-RTK/S-02P-92119900247

Bridge, Spacing: 8 mm

Product advantages
 Screw type bridge, Flexible circuit connection can be realized

Product certification

TECHNICAL DATA

Overview

Number of positions	2
---------------------	---

Dimension

spacing	8mm
---------	-----

Environmental conditions

Ambient temperature (operation)	-40 °C ~ 105 °C (depending on derating curve)
Relative humidity (storage/transport)	25%~75%
Ambient temperature (storage / transport)	-25°C~60°C





Environmental protection

RoHS	No excessive harmful substances
REACH SVHC	Lead 7439-92-1

BUSINESS DATA

Order number	92119900247
Packing unit	250
Minimum order quantity	250
Products weight (without packaging)	7.294

General Tolerances(mm)		0.1/10
0	>3	~
~	>6	~
3	~	~
6	10	~
10	18	~
18	30	~
30	50	~
50	80	~
80	120	~
120	180	~
180	250	~
250	315	~
315	400	~
400	500	~
500	>500	~
±0.12	±0.18	±0.2
±0.22	±0.26	±0.31
±0.26	±0.31	±0.37
±0.37	±0.57	±0.80
±0.80	±1.09	±1.15
±1.15	±1.80	±2.20
±2.20	±2.50	±2.50

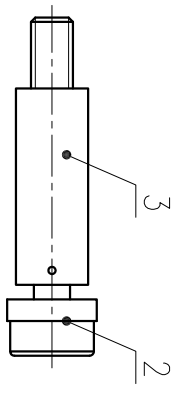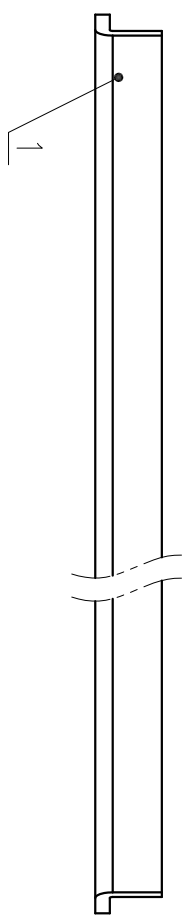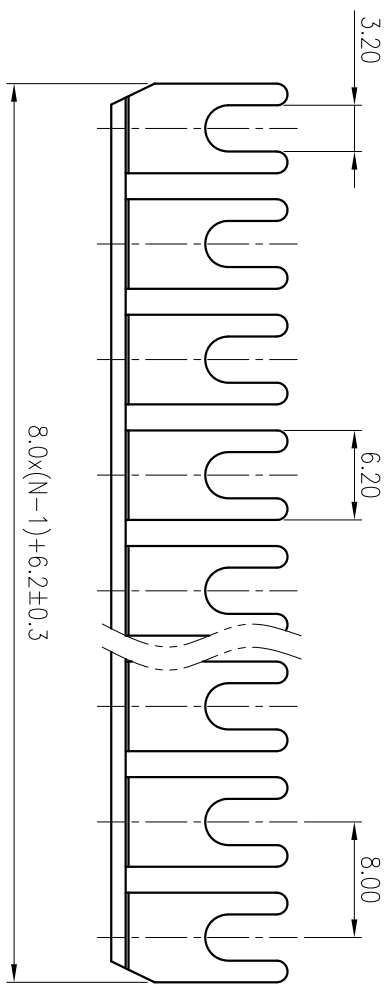

ITEM	NAME OF PART	MATERIAL	NOTES
3	Pillar	Copper Alloy	M3/Sn Plated
2	Screw	Copper Alloy	M3/Sn Plated
1	Bridgeware	Copper	Sn Plated

Torque Tightening(N·m/Lb·in) M3: 0.5/4.47
 Pitch(mm)/Poles 8.0/N=02~10P
 Operating Temperature(°C) -40~+105
 Conforms to RoHS Yes

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: LI GL 2020.06.06
 CHKD: Mao J 2020.06.06
 DRT: Feng X 2020.05.22

NAME: **DEGSON®**
 DRAWING NO.: FBRI6-RTK/S-XXP-00A(H)
 TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	SCALE: 2:1	SHEET
1							1/1