

**Product information**

**FBRI6-RTK/S-02P-92119900248**

Bridge, Spacing: 8 mm

**Product advantages**
 Screw type bridge, Flexible circuit connection can be realized

**Product certification**

## TECHNICAL DATA

**Overview**
**Number of positions**

4

**Dimension**
**spacing**

8mm

**Environmental conditions**
**Ambient temperature (operation)**

-40 °C ~ 105 °C ( depending on derating curve )

**Relative humidity (storage/transport)**

25%~75%

**Ambient temperature (storage / transport)**

-25°C~60°C

**Environmental protection**
**RoHS**

No excessive harmful substances





**REACH SVHC**

Lead 7439-92-1

## BUSINESS DATA

<b>Order number</b>	92119900248
<b>Packing unit</b>	100
<b>Minimum order quantity</b>	100
<b>Products weight (without packaging)</b>	14.588

General Tolerances(mm)		0.1/10
0	>3	~
~	>6	~
3	~	~
6	10	~
10	18	~
18	30	~
30	50	~
50	80	~
80	120	~
120	180	~
180	250	~
250	315	~
315	400	~
400	500	~
500	>500	~
±0.12	±0.18	±0.2
±0.22	±0.26	±0.31
±0.26	±0.31	±0.37
±0.37	±0.57	±0.80
±0.80	±1.09	±1.15
±1.15	±1.80	±2.20
±2.20	±2.50	±2.50

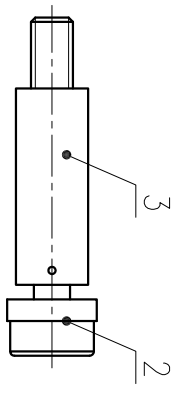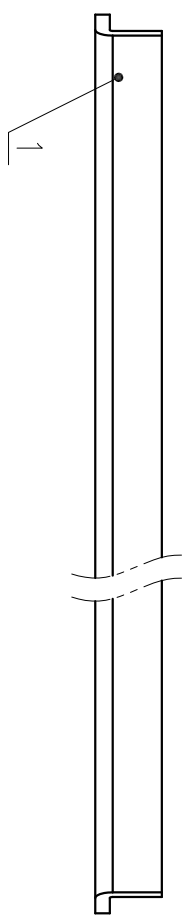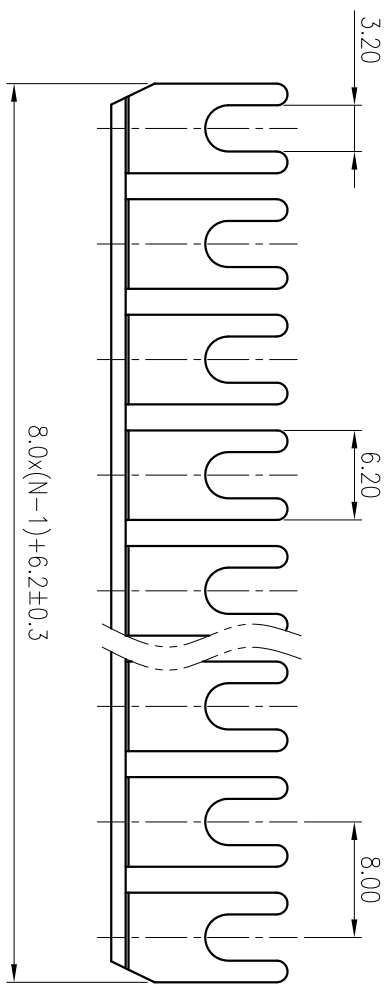

ITEM	NAME OF PART	MATERIAL	NOTES
3	Pillar	Copper Alloy	M3/Sn Plated
2	Screw	Copper Alloy	M3/Sn Plated
1	Bridgeware	Copper	Sn Plated

Torque Tightening(N·m/Lb·in) M3: 0.5/4.47  
 Pitch(mm)/Poles 8.0/N=02~10P  
 Operating Temperature(°C) -40~+105  
 Conforms to RoHS Yes

MATERIAL: SURFACE:

MAT NO.: /  
 STATUS: /  
 APPD: LI GL 2020.06.06  
 CHKD: Mao J 2020.06.06  
 DRT: Feng X 2020.05.22

NAME: **DEGSON®**  
 FBRI6-RTK/S-XXP-00A(H)

REV	ECN	DESCRIPTION	DRT	DATE	TYPE	SCALE	SHEET
					CUSTOMER DRAWING	2:1	1/1

1 2 3 4 5 6