

Overview

Product information



DFB2-5.2-11060000371

Bridge, Spacing: 5.2 mm, Color: red

Product advantages

☑ Plug-in bridge. Flexible circuit connection can be realized;

Product certification

Technical data

Product drawing

3D model

□

Overview

Insulation Materials	PA
Flame retardant grade, in line with UL 94	V0
Number of positions	2
color	red

Dimension

spacing	5.2mm
---------	-------

Environmental conditions

Ambient temperature (operation)	-40 °C ~ 105 °C (depending on derating curve)
Relative humidity (storage/transport)	25%~75%
Ambient temperature (storage / transport)	-25°C~60°C


Environmental protection

RoHS	No excessive harmful substances
REACH SVHC	Lead 7439-92-1

Accessories

Business data

Order number	11060000371
Packing unit	100
Minimum order quantity	100
Products weight (without packaging)	1.06



公差表/General tolerances(mm)														D	0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500		
3	6	10	18	30	50	80	120	180	250	315	400	500			
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50															
														N	±7

5.2×(N-1)+3.6

XX:2-10,20

DFBXX-5.2


>PA66<

C1 1/X

21.95 ±0.4

0.1

1.8 5.2 5.2×(N-1)

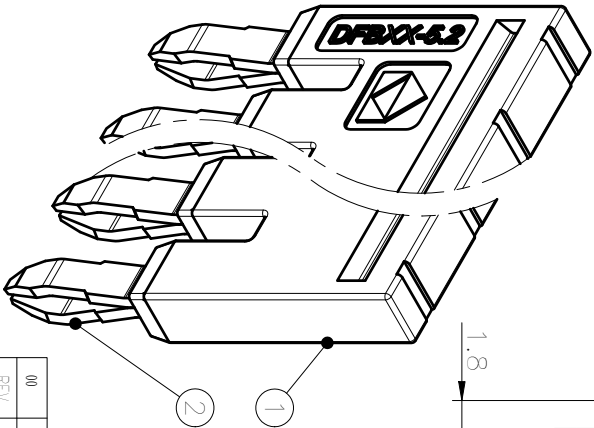

APPR: Peng M
CHKD: Gao WG
DFT: Huang RJ
A4

2022.06.15

2022.06.15

DFBXX-5.2-1Y-00A (H)

CUSTOMER DRAWING

SCALE 4:1

SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
2	Current_carrier	Copper	Sn-Plated
1	Housing	PA66	UL94V_0

间距/Pitch(mm)/线数范围/Poles
使用温度范围/Operating temperature(°C)
符合RoHS环保要求/Conform to RoHS

MATERIAL: /

SURFACE: /

MAT NO./REV: /

MAT STATUS: /

NAME

DRAWING NO.

TYPE

DRAWING STATUS

SCALE

SHEET

REV	ECN	DESCRIPTION	DFT	DATE
00	/	/	Huang RJ	2022.06.15