

Overview

Product information



DFB3-5.2-11060000374

Bridge, Spacing: 5.2 mm, Color: red

Product advantages

- ☑ Plug-in bridge. Flexible circuit connection can be realized;

Product certification

Technical data

Product drawing

3D model

□

Overview

Insulation Materials	PA
Flame retardant grade, in line with UL 94	V0
Number of potentials	3
color	red

Dimension

spacing	5.2mm
---------	-------

Environmental conditions

Ambient temperature (operation)	-40 °C ~ 105 °C (depending on derating curve)
Relative humidity (storage/transport)	25%~75%
Ambient temperature (storage / transport)	-25°C~60°C


Environmental protection

RoHS	No excessive harmful substances
REACH SVHC	Lead 7439-92-1





Accessories

Business data

Order number	11060000374
Packing unit	100
Minimum order quantity	100
Products weight (without packaging)	1.66



公差表/General tolerances(mm)												0.1/1/0
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400
3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500
±0.12 ±0.18 ±0.22 ±0.28 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50												±2

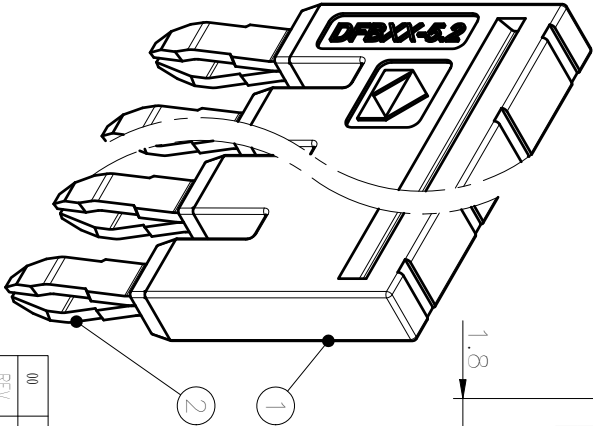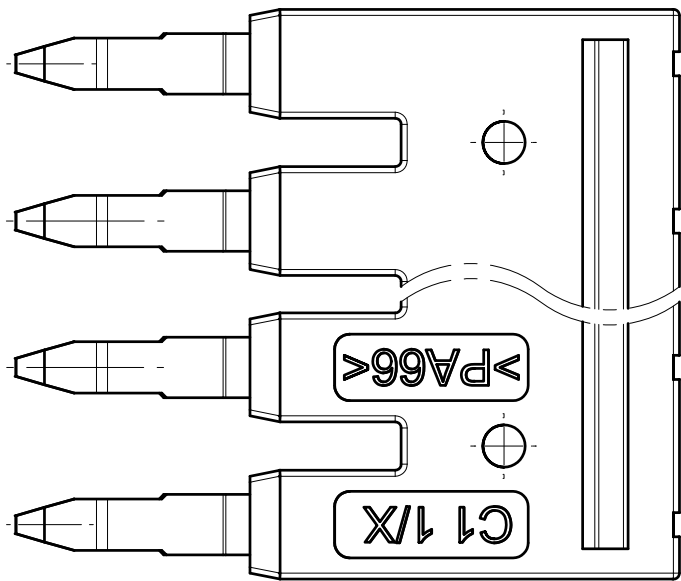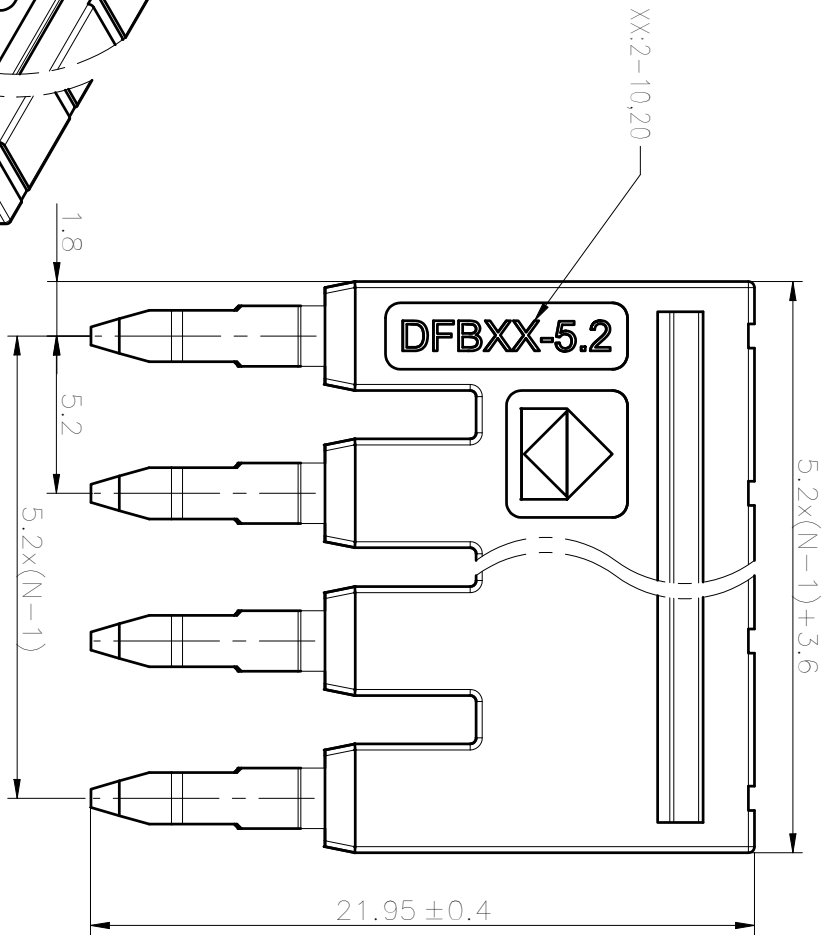

00	/	/	Huang RJ	2022.06.15
REV	ECN	DESCRIPTION	DRAFT	DATE

APPRO	Peng M	2022.06.15
CHKD	Gao WG	2022.06.15
DRAFT	Huang RJ	2022.06.15
A4		

MATERIAL: /	SURFACE: /
MAT NO./REV: /	MAT STATUS: /
NAME	NAME
DRAWING NO.	DRAWING STATUS
TYPE	SCALE
CUSTOMER DRAWING	SHEET
	1/1

2	Current_carrier	Copper	Sn_Plated
1	Housing	PA66	UL94V_0
ITEM	NAME OF PART	MATERIAL	NOTES

间距/Pitch(mm)/线数范围/Poles
使用温度范围/Operating temperature(°C)
符合RoHS 环保要求/Conform to RoHS