


Overview

Product information



FBI3-15-92119900217

Bridge, Spacing: 15.2 mm

Product advantages

☑ Screw type bridge, Flexible circuit connection can be realized;

Product certification

Technical data

Product drawing

3D model

□

Overview

Number of potentials

3

Dimension

spacing

15.2mm

Environmental conditions

Ambient temperature (operation)

-40 °C ~ 105 °C (depending on derating curve)

Relative humidity (storage/transport)

25%~75%

Ambient temperature (storage / transport)

-25°C~60°C

Environmental protection

RoHS

No excessive harmful substances


REACH SVHC

Lead 7439-92-1

Accessories

Business data	
Order number	92119900217
Packing unit	100
Minimum order quantity	100
Products weight (without packaging)	28.8

木柱径/General (tolerances) (mm)	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100																																																																									
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	>630	>800	>1000	>1250	>1600	>2000	>2500	>3150	>4000	>5000	>6300	>8000	>10000	>12500	>16000	>20000	>25000	>31500	>40000	>50000	>63000	>80000	>100000	>125000	>160000	>200000	>250000	>315000	>400000	>500000	>630000	>800000	>1000000	>1250000	>1600000	>2000000	>2500000	>3150000	>4000000	>5000000	>6300000	>8000000	>10000000	>12500000	>16000000	>20000000	>25000000	>31500000	>40000000	>50000000	>63000000	>80000000	>100000000	>125000000	>160000000	>200000000	>250000000	>315000000	>400000000	>500000000	>630000000	>800000000	>1000000000	>1250000000	>1600000000	>2000000000	>2500000000	>3150000000	>4000000000	>5000000000	>6300000000	>8000000000	>10000000000	>12500000000	>16000000000	>20000000000	>25000000000	>31500000000	>40000000000	>50000000000	>63000000000	>80000000000	>100000000000	>125000000000	>160000000000	>200000000000	>250000000000	>315000000000	>400000000000	>500000000000	>630000000000	>800000000000	>1000000000000	>1250000000000	>1600000000000	>2000000000000	>2500000000000	>3150000000000	>4000000000000	>5000000000000	>6300000000000	>8000000000000	>10000000000000	>12500000000000	>16000000000000	>20000000000000	>25000000000000	>31500000000000	>40000000000000	>50000000000000	>63000000000000	>80000000000000	>100000000000000	>125000000000000	>160000000000000	>200000000000000	>250000000000000	>315000000000000	>400000000000000	>500000000000000	>630000000000000	>800000000000000	>1000000000000000	>1250000000000000	>1600000000000000	>2000000000000000	>2500000000000000	>3150000000000000	>4000000000000000	>5000000000000000	>6300000000000000	>8000000000000000	>10000000000000000	>12500000000000000	>16000000000000000	>20000000000000000	>25000000000000000	>31500000000000000	>40000000000000000	>50000000000000000	>63000000000000000	>80000000000000000	>100000000000000000	>125000000000000000	>160000000000000000	>200000000000000000	>250000000000000000	>315000000000000000	>400000000000000000	>500000000000000000	>630000000000000000	>800000000000000000	>1000000000000000000	>1250000000000000000	>1600000000000000000	>2000000000000000000	>2500000000000000000	>3150000000000000000	>4000000000000000000	>5000000000000000000	>6300000000000000000</

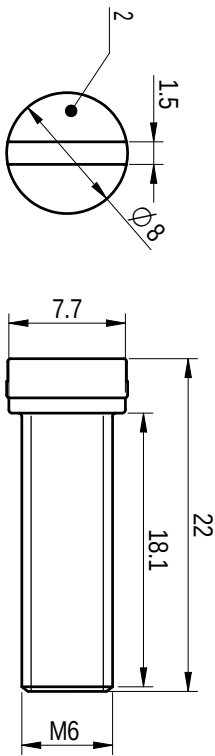

2	Screw	Copper alloy	Ni plated
1	Current carrier	Copper	Sn plated
ITEM	NAME OF PART	MATERIAL.	NOTES
面距/Pitch(mm)/线数范围/Poles		15,2/N=02~10P	
符合RoHS环保要求/Conform to RoHS		Yes	

 DEGSON				MATERIAL: /		SURFACE/COLOR: /										
APPD: Pengli				2022.06.17		MAT NO./REV: / /		MAT STATUS: /								
CHMD: GaoJing				2022.06.17		FBIX-15										
DRAFT: XieJD				2022.06.17												
00		/	XieJD		2022.06.17		DRAWING NO.		TYPE		DRAWING STATUS		SCALE		SHEET	
REV		ECN	DESCRIPTION		DRAFT		DATE		/		CUSTOMER DRAWING		/		2:1 1/1	
																