

Overview

Product information



KLM3-20×8-11060000573

Marker strip, gray, Applicable end stopper, Marking range:20×8mm

Product advantages

- ☒ Extended Terminal Blocks Marking area;
- ☒ Marking can be done directly with self-adhesive labels

Product certification

Technical data

Product drawing

3D model

□

Overview

Insulation Materials	PA
Flame retardant grade, in line with UL 94	V0
Number of positions	1
color	Gray

Dimension

lettering field size	20X8mm
----------------------	--------

Environmental conditions

Relative humidity (storage/transport)	25%~75%
Ambient temperature	-40℃...105℃

Environmental protection

RoHS	No excessive harmful substances
REACH SVHC	Lead 7439-92-1

Accessories

Business data	
Order number	11060000573
Packing unit	50
Minimum order quantity	50
Products weight (without packaging)	0.88

FOR-1755 Rev.1.5






2

3

4

5

6

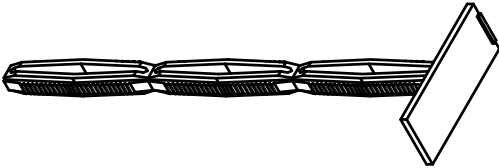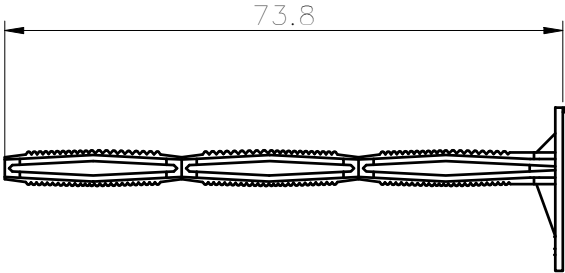

D
2:1

公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	±9°
3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

00	/	/	XieD	2022.06.13
REV	ECN	DESCRIPTION	DWPT	DATE

		MATERIAL: PA66		SURFACE/COLOR: /	
APPD: Pengli		2022.06.13		NAME	
CHND: Gaow		2022.06.13		DRAWING NO.	
DWPT: XieD		2022.06.13		TYPE	
		A4		CUSTOMER DRAWING	
		DRAWING STATUS		SCALE	
1/1		SHEET		1/1	