

DA-275 BFG

SPD - for low voltage / SPD type 3 / With RFI filter


Surge protection with RFI filter

visual fault signalling, grounding terminal, class I device


- surge protection with integrated RFI filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance



Product dimensions



Basic circuit diagram

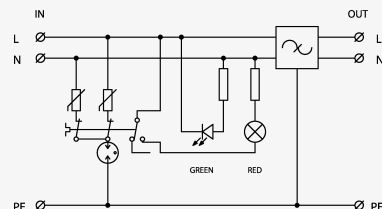

Parameter name		Parameter value
Type of SPD		T3
Mounting		surface on the desk
Nominal voltage	U_n	230 V AC
Maximum operating voltage	U_c	275.00 V AC
Nominal load current	I_L	16.000 A
Type of network		TN
Maximum overcurrent protection		16 A gL/gG or C 16 A
Filter attenuation at 1MHz (50 Ω /50 Ω) unsymmetrical		30 dB
Nominal discharge current (8/20 μ s) L-N	I_n	3.00 kA
Nominal discharge current (8/20 μ s) L+N-PE	I_n	5.00 kA
Nominal discharge current (8/20 μ s) N-PE	I_n	3.00 kA
Test voltage L-N	U_{oc}	6.0 kV
Test voltage L+N-PE	U_{oc}	10.0 kV
Test voltage N-PE	U_{oc}	6.0 kV
Voltage protection level mode L-N	U_p	1.20 kV
Voltage protection level mode L-PE	U_p	1.50 kV
Voltage protection level mode N-PE	U_p	1.50 kV

Response time L-N	t_a	25 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (max)		2.50 mm ²
Cross-section of connected conductors stranded (max)		2.50 mm ²
Fault indication		red indicator
Remote indication		no
Degree of protection		IP 20
Range of ambient temperatures (min/max)		-40 / 80 °C
Humidity		5 - 95 %
According to standard		EN 61643-11:2012, IEC 61643-11:2011
ETIM Class		EC000942
Customs tariff number		85363010
EAN		8595090506294
Order number		A00629